

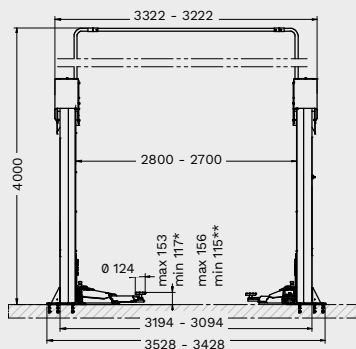


Technical Data


KPX42E
KPX42ELIK-KPX42LIK




KPX55ELIKTA
KPX55LIKTA



KPX42LIK



KPX42E



	KPX42E	KPX42LIK	KPX55LIKTA
Capacity	4200 kg	4200 kg	5500 kg
Max. lifting height	2042 mm	2042 mm	2052 mm
Lifting time	58 s	58 s	58 s
Min. pad height	117 mm	115 mm	114 mm
Max. pad height	153 mm	156 mm	169 mm
Column height	2860 mm	2860 mm	3080 mm
Drive-through width	2504 mm	2504 mm	2762 mm
Min. ceiling height	4100 mm	4100 mm	5300 mm
Arm layout	asymmetric	symmetric	asymmetric
Min. front arm length	525 mm	705 mm	705 mm
Max. front arm length	981 mm	1330 mm	1790 mm
Min. rear arm length	922 mm	705 mm	822 mm
Max. rear arm length	1460 mm	1330 mm	1791 mm
Driving power	2x3.5 kW	2x3.5 kW	2x3.5 kW
Width	3428-3528 mm	3428-3528 mm	3724-3824 mm
Height	4000 mm	4000 mm	5210 mm

	Item no.	Double control panel + Energy kit
KPX42E	RAV.KPX42.198303	✓
KPX42LIK	RAV.KPX42.198440	
KPX42ELIK	RAV.KPX42.198488	✓
KPX55LIKTA	RAV.KPX55.198945	
KPX55ELIKTA	RAV.KPX55.198976	✓

TEq-Link
connected workshop

All models of this series are equipped with up/down buttons and TEq-Link connectivity.